


## Din Rail mounting D Sub Interface Modules

These modules provide a quick and compact method of breaking out D Sub cables to screw terminals. Each module has both male and female D Sub connectors. They can also act as gender changers.

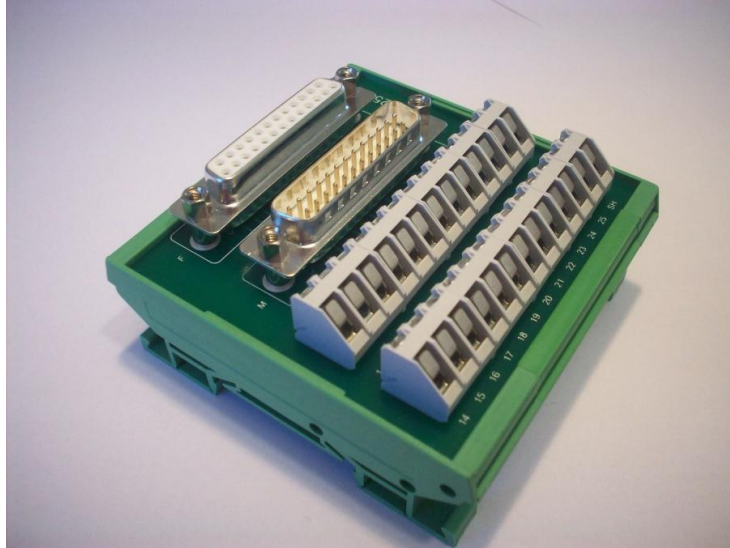

FELD25

### Features

- D Sub male and female to screw terminals
- Terminals marked 1 2 3 etc (+ Shield)
- Separate shield connection
- 35mm DIN rail mounting
- Option for 32mm (G) rail mounting
- Available with optional wall mounting plates
- 45° terminals for easy access
- RoHS compliant
- SVHC free (2011)

### Specification

- Rating 50V DC 100mA
- Cable entry 0.2 - 4mm<sup>2</sup> (30 – 12 AWG)
- Terminal screw M3
- Strip length 6mm (0.24")
- Max terminal torque 0.5Nm (4 lb-in)
- Dimensions: Height 39mm (1.54")  
Width 83mm (3.27")  
Length FELD09 35mm (1.38")  
FELD15 58mm (2.28")  
FELD25 78mm (3.07")  
FELD37 114mm (4.49")  
FELD50 136mm (5.36")

Part	Description
FELD09	9 way male and female D Sub screw terminal interface. 35 mm din rail mounting
FELD15	15 way male and female D Sub screw terminal interface. 35 mm din rail mounting
FELD25	25 way male and female D Sub screw terminal interface. 35 mm din rail mounting
FELD37	37 way male and female D Sub screw terminal interface. 35 mm din rail mounting
FELD50	50 way male and female D Sub screw terminal interface. 35 mm din rail mounting

Add suffix W for wall mounting plates. Add suffix 32 for Universal (15, 32 and 35mm) din rail mount

**FEL** Flaim Electronics Ltd [www.flaimelec.com](http://www.flaimelec.com) [info@flaimelec.com](mailto:info@flaimelec.com)